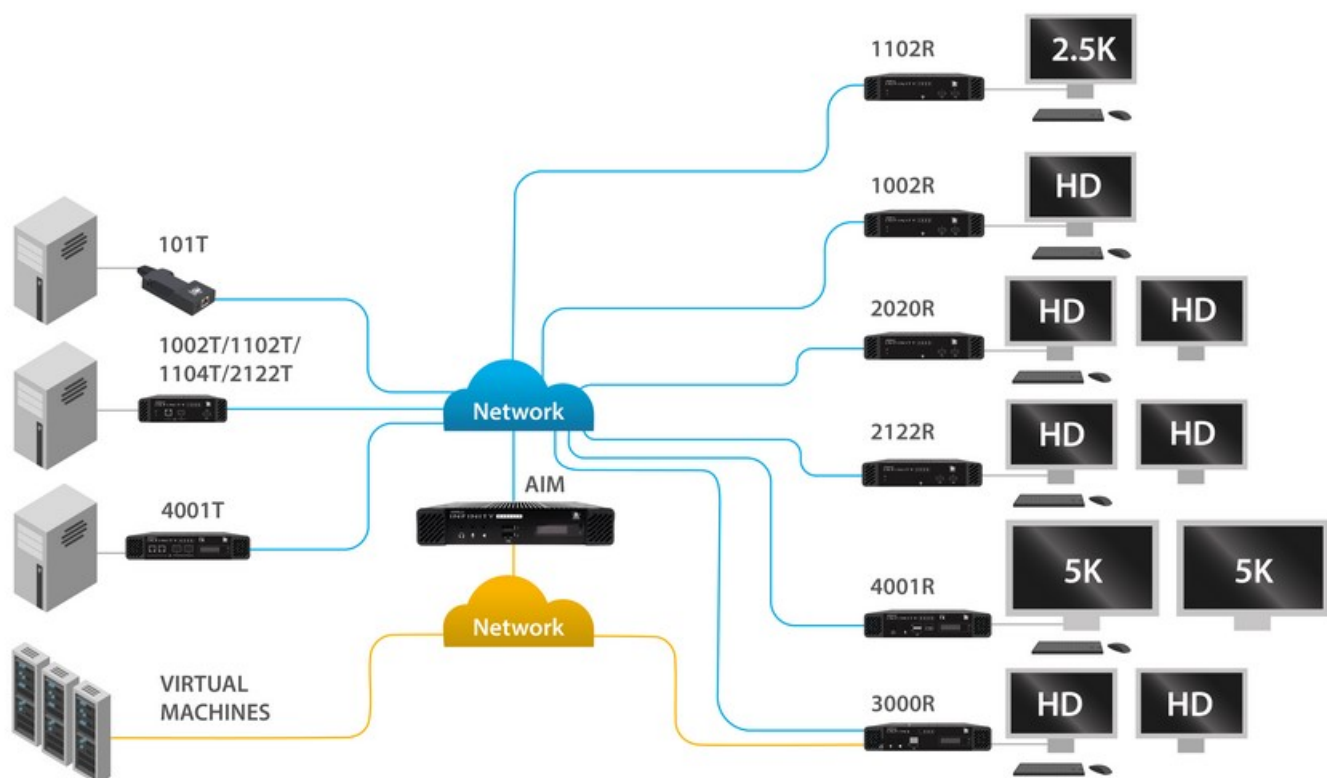

ADDERLink Infinity

High Performance IP KVM Powering Real-Time, Pixel Perfect, Control of Devices Anywhere on your Network, Anywhere in the World



The multi award-winning ADDERLink INFINITY range gives your business infinite opportunities. It is designed to enhance your operational effectiveness, improve inter-team collaboration, streamline IT workflows, secure your network and so much more.

Trusted by organizations around the world, the ADDERLink INFINITY range can be used as a point-to-point extender, or as an IP KVM matrix utilizing your existing IP network, to give thousands of users real-time access to their computers - no matter where they are based.



Businesses constantly upsize and downsize, reorganize and re-focus, and KVM needs to be flexible enough to adapt with them. It is normal for a company`s data systems to grow or shrink significantly during the lifetime of a KVM system, and the technology must be able to adapt.

Designing an Adder IP KVM matrix could not be easier. Organizations are no longer tied to the limitations of a single switch and can instead create networks to meet their operational needs.

Discover the ADDERLink INFINITY Range

Part	Video	Connectors	USB	Audio	Network	Extra Features
Transmitter						
ALIF101T DP	1 @ up to 2560x1600	DP	USB 2.0 Type A	DisplayPort digital audio plus bi-directional	1 x RJ45	-

				USB audio		
ALIF101T HDMI	1 @ up to 2560x1600	HDMI	USB 2.0 Type A	HDMI digital audio plus bi-directional USB audio	1 x RJ45	-
ALIF 101T DVI	1 @ up to 1920x1200	DVI	USB 2.0 Type A	Bi-directional USB audio 2 channel 16bit 48KHz	1 x RJ45	-
ALIF100T VGA	1 @ up to 1920x1200	VGA	USB 1.2 Type A	Bi-directional USB audio 2 channel 16bit 48KHz	1 x RJ45	-
ALIF1002T	1 @ up to 1920x1200	DVI	USB 2.0 Type B	Bi-directional Analog 2 x 3.5mm audio jack	1 x RJ45, 1 x SFP	RS232
ALIF1102T	1 @ up to 2560x1600	DP	USB 2.0 Type A, USB 2.0 Type B	Bi-directional USB audio 2 channel 16bit @ 48KHz	1 x RJ45, 1 x SFP	RS232 (via USB Converter)
ALIF1104T	1 @ up to 2560x1600	HDMI	USB 2.0 Type A, USB 2.0 Type B	Bi-directional USB audio 2 channel 16bit @ 48KHz	1 x RJ45, 1 x SFP	RS232 (via USB Converter)
ALIF2002T -	2 @ up to 1920x1200 / 1 @ up to 2560x1600	DVI (Dual-link)	USB 2.0 Type B	Bi-directional Analog 2 x 3.5mm audio jack	1 x RJ45, 1 x SFP	RS232

ALIF2020T	2 @ up to 1920x1200	DVI	USB 2.0 Type B	Bi-directional Analog 2 x 3.5mm audio jack	1 x RJ45, 1 x SFP	RS232
ALIF2112T	2 @ up to 1920x1200 / 1 @ up to 2560x1600	DVI (Dual-link)	USB 2.0 Type B	Bi-directional Analog 2 x 3.5mm audio jack	1 x RJ45, 1 x SFP	RS232 + RealVNC Gateway
ALIF2122T	2 @ up to 1920x1200 / 1 @ up to 2560x1600	DP	USB 2.0 Type B	Bi-directional USB audio 2 channel 16bit @ 48KHz	1 x RJ45/SFP, 1 x SFP	RS232 (via USB Converter)
ALIF2124T	2 @ up to 1920x1200 / 1 @ up to 2560x1600	HDMI	USB 2.0 Type A, USB 2.0 Type B	Bi-directional USB audio 2 channel 16bit @ 48KHz	1 x RJ45/SFP, 1 x SFP	RS232 (via USB Converter)
ALIF4001T	2 @ up to 5120x2880	DP	USB 2.0 Type B	DisplayPort digital audio plus bi-directional analog via 2 x 3.5mm audio jack	2 x SFP+	RS232
Receivers						
ALIF1002R	1 @ up to 1920x1200	DVI	4-Port USB 2.0 hub	Bi-directional analog via 2 x 3.5mm audio jack	1 x RJ45, 1 x SFP	RS232
ALIF1102R	1 @ up to 2560x1600	DP	4-Port USB 2.0 hub	Bi-directional analog via 2 x 3.5mm audio jack	1 x RJ45, 1 x SFP	RS232 (via USB Converter)

ALIF2020R	2 @ up to 1920x1200	DVI	4-Port USB 2.0 hub	Bi-directional analog via 2 x 3.5mm audio jack	1 x RJ45, 1 x SFP	RS232
ALIF2122R	2 @ up to 1920x1200 / 1 @ up to 2560x1600	DP	4-Port USB 2.0 hub	Bi-directional analog via 2 x 3.5mm audio jack	1 x RJ45/SFP, 1 x SFP	RS232 (via USB Converter)
ALIF3000R	2 @ up to 1920x1200 / 1 @ up to 2560x1600	DP	4-Port USB 2.0 hub	Bi-directional analog via 2 x 3.5mm audio jack	1 x RJ45 1 x SFP	Virtual Machine Access
ALIF4001R	2 @ up to 5120x2880	DP	5-Port USB 2.0 hub	DisplayPort digital audio plus bi-directional analog via 2 x 3,5mm audio jack	2 x SFP+	RS232 (via USB Converter)